INTERLAYER ADHESION PROMOTER FOR LOW K MATERIALS

5   BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to the production of multilayered dielectric structures and to semiconductor devices and integrated circuits comprising

10   these structures. The structures of the invention are prepared by adhering a porous dielectric layer to a substantially nonporous capping layer via an intermediate adhesion promoting dielectric layer.

DESCRIPTION OF THE RELATED ART

15   As feature sizes in integrated circuits are reduced to 0.15 μm and below, problems with interconnect RC delay, power consumption and signal cross-talk have become increasingly difficult to resolve. It is believed that the integration of low dielectric constant materials for interlevel dielectric (ILD) and intermetal dielectric (IMD) applications will help to solve these problems.

20   While there have been previous efforts to apply low dielectric constant materials to integrated circuits, there remains a longstanding need in the art for further improvements in processing methods and in the optimization of both the dielectric and mechanical properties of such materials used in the manufacture of integrated circuits.

25

One type of material with a low dielectric constant is nanoporous silica films which is prepared from silicon containing pre-polymers by a spin-on sol-gel technique. Air has a dielectric constant of 1, and when air is introduced into a suitable silica material having a nanometer-scale pore structure, such films can

30   be prepared with relatively low dielectric constants ("k"). Nanoporous silica

1

materials are attractive because such materials have demonstrated high
mechanical strength as indicated by modulus and stud pull data. Mechanical
properties can be optimized by controlling the pore size distribution of the
porous film. Nanoporous silica materials are attractive because it is possible

5   to control the pore size, and hence the density, mechanical strength and
dielectric constant of the resulting film material. In addition to a low k,
nanoporous films offer other advantages including thermal stability to 900°C;
substantially small pore size; preparation from materials that are widely used
in semiconductors; the ability to "tune" the dielectric constant over a wide

10   range; and deposition can be achieved using tools similar to those employed
for conventional spin-on glass processing.

Thus, high porosity in silica materials leads to a lower dielectric constant than
would otherwise be available from the same materials in non-porous form. An

15   additional advantage is that additional compositions and processes may be
employed to produce nanoporous films while varying the relative density of
the material. Other materials requirements include the need to have all pores
substantially smaller than circuit feature sizes, the need to manage the strength
decrease associated with porosity, and the role of surface chemistry on

20   dielectric constant and environmental stability.

Nanoporous silica films have previously been fabricated by a number of
methods. For example, nanoporous films have been prepared using a mixture
of a solvent and a silica precursor, which is deposited on a substrate suitable

25   for the purpose. Usually, a precursor in the form of, e.g., a spin-on-glass
composition is applied to a substrate, and then polymerized in such a way as to
form a dielectric film comprising nanometer-scale voids. When forming such
nanoporous films, e.g., by spin-coating, the film coating is typically catalyzed
with an acid or base catalyst and water to cause polymerization/gelation

("aging") during an initial heating step. In order to achieve maximum strength through pore size selection, a low molecular weight porogen is used.

Density (or the inverse, porosity) is the key parameter of nanoporous films
5   that controls the dielectric constant of the material, and this property is readily varied over a continuous spectrum from the extremes of an air gap at a porosity of 100% to a dense silica with a porosity of 0%. As density increases, dielectric constant and mechanical strength increase but the degree of porosity decreases, and vice versa. This suggests that the density range of
10   nanoporous films must be optimally balanced between the desired range of low dielectric constant and the mechanical properties acceptable for the desired application.

One of the major difficulties in integrating porous low k materials, whether
15   CVD ("Chemical Vapor Deposition") or spin-on glasses is their adhesion to either a CVD capping layer or metal barrier materials. Existing methods for improving the adhesion include increasing the ILD surface roughness through a surface pre-treatment using non-reactive gases such as argon or helium; modifying the surface chemistry via reactive ion etching, oxidative/reductive
20   etching or ashing; and pre-treatment of the film with NH_3. The danger of modifying the surface chemistry is that the surface pre-treatment will undoubtedly change the chemical nature of both the surface and also the bulk of the material. Hence it might damage other film properties such as dielectric constant, thermal stability and chemical stability. Furthermore, gases that are
25   used in etching contain fluorides which will leave some undesired fluoride containing residue in the ILD. The disadvantage of pre-treatment of the film with NH_3 is that any nitrogen containing species could potentially be poisonous in the lithography step if such nitrogen containing residue is not completely removed. Therefore there is a need to develop an adhesion
30   promoter layer that can enhance the adhesion between the ILD or IMD and a

3

capping or metal barrier material. Such adhesion promoter should also have little adverse effect on the film properties of the ILD and present few ill effects during the integration steps.

5   A prerequisite for the structures of the present invention is that the porous ILD or IMD must have good adhesion with the adhesion promoting layer. The present invention employs a dense spin-on, low k material as the adhesion promoter layer. Such a dense material allows for an intimate contact with either a capping material or a metal barrier material.

10

SUMMARY OF THE INVENTION

The invention provides a multilayered dielectric structure which comprises:

a) a porous dielectric layer which has a porosity of about 10% or more;

b) an adhesion promoting dielectric layer on the porous dielectric layer which

15   has a porosity of about 10% or less; and

c) a substantially nonporous capping layer on the adhesion promoting dielectric layer.

The invention also provides a microelectronic device which comprises a

20   substrate, a porous dielectric layer on the substrate, said porous dielectric layer having a porosity of about 10% or more; an adhesion promoting dielectric layer on the porous dielectric layer which has a porosity of about 10% or less; and a substantially nonporous capping layer on the adhesion promoting dielectric layer.

25

The invention further provides a method for forming a multilayered dielectric structure comprising:

a) coating a substrate with a first composition comprising a pre-polymer, solvent, optional catalyst, and a porogen to form a film, cross-linking the

30   composition to produce a gelled film, and heating the gelled film at a

4

temperature and for a duration effective to remove substantially all of said

porogen to produce a porous dielectric layer which has a porosity of about

10% or more;

b) coating the porous dielectric layer with a second composition comprising a

5   silicon containing pre-polymer, solvent, and optional catalyst; followed by

cross-linking and heating to produce an adhesion promoting dielectric layer on

the porous dielectric layer which has a porosity of about 10% or less;

c) forming a substantially nonporous capping layer on the adhesion promoting

dielectric layer.

10

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a graph showing the correlations of tape test yield (%Pass) with

silicon carbide thickness at a fixed NANOGLASS® E material and adhesion

promoter thickness.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A multilayered dielectric structure is formed by first producing a porous

dielectric layer which has a porosity of about 10% or more, suitably more than

20   10%. Preferably the porous dielectric layer has a porosity of from about 10%

to about 90%, more preferably from about 20% to about 80% and most

preferably from about 35% to about 60%. Preferably the porous dielectric

layer has a dielectric constant of from about 1.3 to about 3.0, more preferably

from about 1.5 to about 2.8 and most preferably from about 1.7 to about 2.5.

25   The porous dielectric layer may comprise a nanoporous silica, silicon oxide,

an organosilsesquioxane, such as methylsilsesquioxane, a polysiloxane, a

porous organic polymer or combinations thereof. Typically, silicon-based

dielectric films, including nanoporous silica dielectric films, are prepared from

a composition comprising a suitable silicon containing pre-polymer, blended

30   with a porogen and a catalyst which may be a metal-ion-free onium compound

5

or a nucleophile. One or more optional solvents and/or other components may also be included. The dielectric precursor composition is applied to a substrate suitable, e.g., for production of a semiconductor device, such as an integrated circuit, by any art-known method to form a film. The composition

5   is then crosslinked, such as by heating to produce a gelled film. The gelled film is then heated at a higher temperature to remove substantially all of the porogen.

The films produced by the processes of the invention have a number of

10   advantages over those previously known to the art, including improved mechanical strength, that enables the produced film to withstand the further processing steps required to prepare a semiconductor device on the treated substrate, and a low and stable dielectric constant. The property of a stable dielectric constant is advantageously achieved without the need for further

15   surface modification steps to render the film surface hydrophobic, as was formerly required by a number of processes for forming nanoporous silica dielectric films. Instead, the silica dielectric films are sufficiently hydrophobic as initially formed.

20   Further, the processes of the invention advantageously require a relatively low temperature for the initial polymerization (i.e., gelling or aging) of an applied prepolymer composition. The processes of the invention provided for a nanometer scale diameter pore size, which is also uniform in size distribution. The film typically has an average pore diameter ranging from about 1 nm to

25   about 30 nm, or more preferably from about 1 nm to about 10 nm and typically from about 1 nm to about 5 nm.

It should be understood that the term nanoporous dielectric films, is intended to refer to dielectric films prepared by the inventive methods from an organic or

30   inorganic glass base material, e.g., any suitable silicon-based material,

Poly(arylene ether), polyimide or combinations thereof. Other examples
include phenylethynylated-aromatic monomer or oligomer ; fluorinated or
non-fluorinated poly(arylene ethers) such as taught by commonly assigned US
Patents 5,986,045; 6,124,421; 6,291,628 and 6,303,733; bisbenzocyclobutene;
5   and organosiloxanes such as taught by commonly assigned US Patent
6,143,855 and pending US patent application Serial 10/078,919 filed February
19, 2002 and 10/161561 filed June 3, 2002; Honeywell International Inc.'s
commercially available HOSP ® product; nanoporous silica such as taught by
commonly assigned US Patent 6,372,666; Honeywell International Inc.'s
10   commercially available NANOGLASS ® E product; organosilsesquioxanes
taught by commonly assigned WO 01/29052; and fluorosilsesquioxanes taught
by commonly US Patent 6,440,550, incorporated herein in their entireties.
Other useful dielectric materials are disclosed in commonly assigned   pending
patent applications PCT/US01/22204 filed October 17, 2001 (claiming the
15   benefit of our commonly assigned pending patent applications US Serial No.
09/545058 filed April 7, 2000; US Serial No. 09/618945 filed July 19, 2000;
US Serial No. 09/897936 filed July 5, 2001; and US Serial No. 09/902924
filed July 10, 2001; and International Publication WO 01/78110 published
October 18, 2001); PCT/US01/50812 filed December 31, 2001; 60/_____ filed
20   May 30, 2002; 60/347195 filed January 8, 2002 and 60/384303 filed May 30,
2002; 60/350187 filed January 15, 2002 and 10/160773 filed May 30, 2002;
and 10/158513 filed May 30, 2002 and 10/158548 filed May 30, 2002, which
are incorporated herein by reference in their entireties.   Additionally, the
term "aging" refers to gelling, condensing, or polymerization, of the combined
25   silica-based precursor composition on the substrate after deposition. The term
"curing" refers to the removal of residual silanol (Si-OH) groups, removal of
residual water, and the process of making the film more stable during
subsequent processes of the microelectronic manufacturing process. The
curing process is performed after gelling, typically by the application of heat,
30   although any other art-known form of curing may be employed, e.g., by the

application of energy in the form of an electron beam, ultraviolet radiation, and the like as taught by commonly assigned patent publication PCT/US96/08678 and US Patents 6,042,994; 6,080,526; 6,177,143; and 6,235,353, which are incorporated herein by reference in their entireties.

5

Dielectric films, e.g., interlevel dielectric coatings or metal level dielectrics, are prepared by applying suitable compositions to a substrate. Prior to application of the base materials to form the dielectric film, the substrate surface is optionally prepared for coating by standard, art-known cleaning

10   methods. The coating is then processed to achieve the desired type and consistency of dielectric coating, wherein the processing steps are selected to be appropriate for the selected precursor and the desired final product. Further details of the inventive methods and compositions are provided below.
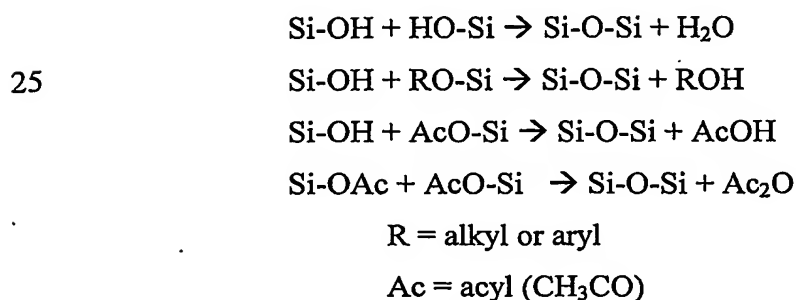
15   A substrate as used herein includes any suitable composition formed before a nanoporous silica film of the invention is applied to and/or formed on that composition. For example, a substrate is typically a silicon wafer suitable for producing an integrated circuit, and the material from which the nanoporous silica film is formed is applied onto the substrate. Substrates contemplated

20   herein may comprise any desirable substantially solid material. Particularly desirable substrate layers comprise films, glass, ceramic, plastic, metal or coated metal, or composite material. In preferred embodiments, the substrate comprises a silicon or gallium arsenide die or wafer surface, a packaging surface such as found in a copper, silver, nickel or gold plated leadframe, a

25   copper surface such as found in a circuit board or package interconnect trace, a via-wall or stiffener interface ("copper" includes bare copper and its oxides), a polymer-based packaging or board interface such as found in a polyimide-based flex package, lead or other metal alloy solder ball surface, glass and polymers. Useful substrates include silicon and compositions containing

30   silicon such as crystalline silicon, polysilicon, amorphous silicon, epitaxial

silicon, and silicon dioxide ("SiO₂"), silicon nitride, silicon oxide, silicon oxycarbide, silicon dioxide, silicon carbide, silicon oxynitride, organosiloxanes, organo silicon glass, fluorinated silicon glass, as well as titanium nitride, tantalum nitride, tungsten nitride, aluminum, copper,

5   tantalum, polymers, gallium arsenide and combinations thereof. A circuit board comprising the multilayered structure will have mounted on its surface patterns for various electrical conductor circuits. The circuit board substrate may include various reinforcements, such as woven non-conducting fibers or glass cloth. Such circuit boards may be single sided, as well as double sided.

10

On the surface of the substrate is an optional pattern of raised lines, such as metal, oxide, nitride or oxynitride lines which are formed by well known lithographic techniques. Suitable materials for the lines include silica, silicon nitride, titanium nitride, tantalum nitride, aluminum, aluminum alloys, copper,

15   copper alloys, tantalum, tungsten and silicon oxynitride. Useful metallic targets for making these lines are taught in commonly assigned US Patents 5,780,755; 6,238,494; 6,331,233B1; and 6,348,139B1 and are commercially available from Honeywell International Inc. These lines form the conductors or insulators of an integrated circuit. Such are typically closely separated from

20   one another at distances of about 20 micrometers or less, preferably 1 micrometer or less, and more preferably from about 0.05 to about 1 micrometer. Other optional features of the surface of a suitable substrate include an oxide layer, such as an oxide layer formed by heating a silicon wafer in air, or more preferably, an SiO₂ oxide layer formed by chemical

25   vapor deposition of such art-recognized materials as, e.g., plasma enhanced tetraethoxysilane oxide ("PETEOS"), plasma enhanced silane oxide ("PE silane") and combinations thereof, as well as one or more previously formed nanoporous silica dielectric films.

The nanoporous silica film of the invention can be applied so as to cover and/or lie between such optional electronic surface features, e.g., circuit elements and/or conduction pathways that may have been previously formed features of the substrate. Such optional substrate features can also be applied

5   above the nanoporous silica film of the invention in at least one additional layer, so that the low dielectric film serves to insulate one or more, or a plurality of electrically and/or electronically functional layers of the resulting integrated circuit. Thus, a substrate according to the invention optionally includes a silicon material that is formed over or adjacent to a nanoporous

10   silica film of the invention, during the manufacture of a multilayer and/or multicomponent integrated circuit.

A crosslinkable composition employed for forming nanoporous silica dielectric films according to the invention includes one or more silicon

15   containing prepolymers that are readily condensed. It should have at least two reactive groups that can be hydrolyzed. Such reactive groups include, alkoxy (RO), acetoxy (AcO), etc. Without being bound by any theory or hypothesis as to how the methods and compositions of the invention are achieved, it is believed that water hydrolyzes the reactive groups on the silicon

20   monomers to form Si-OH groups (silanols). The latter will undergo condensation reactions with other silanols or with other reactive groups, as illustrated by the following formulas:

$$Si\text{-}OH + HO\text{-}Si \rightarrow Si\text{-}O\text{-}Si + H_2O$$

25

$$Si\text{-}OH + RO\text{-}Si \rightarrow Si\text{-}O\text{-}Si + ROH$$

$$Si\text{-}OH + AcO\text{-}Si \rightarrow Si\text{-}O\text{-}Si + AcOH$$

$$Si\text{-}OAc + AcO\text{-}Si \rightarrow Si\text{-}O\text{-}Si + Ac_2O$$

$$R = alkyl\ or\ aryl$$

$$Ac = acyl\ (CH_3CO)$$

30

These condensation reactions lead to formation of silicon containing polymers. In one embodiment of the invention, the prepolymer includes a compound, or any combination of compounds, denoted by Formula I:

$R_x - Si - L_y$ (Formula I)

5   wherein x is an integer ranging from 0 to about 2 and y is 4-x, an integer ranging from about 2 to about 4,

R is independently alkyl, aryl, hydrogen, alkylene, arylene and/or combinations of these,

L is independently selected and is an electronegative group, e.g., alkoxy,

10   carboxyl, amino, amido, halide, isocyanato and/or combinations of these.

Particularly useful prepolymers are those provided by Formula I when x ranges from about 0 to about 2, y ranges from about 2 to about 4, R is alkyl or aryl or H, and L is an electronegative group, and wherein the rate of hydrolysis

15   of the Si-L bond is greater than the rate of hydrolysis of the $Si-OCH_2CH_3$ bond. Thus, for the following reactions designated as (a) and (b):

(a) $Si-L + H_2O \rightarrow Si-OH + HL$

(b) $Si-OCH_2CH_3 + H_2O \rightarrow Si-OH + HOCH_2CH_3$

20   The rate of (a) is greater than rate of (b).

Examples of suitable compounds according to Formula I include, but are not limited to:

$Si(OCH_2CF_3)_4$ tetrakis(2,2,2-trifluoroethoxy)silane,

25     $Si(OCOCF_3)_4$ tetrakis(trifluoroacetoxy)silane*,

$Si(OCN)_4$ tetraisocyanatosilane,

$CH_3Si(OCH_2CF_3)_3$ tris(2,2,2-trifluoroethoxy)methylsilane,

$CH_3Si(OCOCF_3)_3$ tris(trifluoroacetoxy)methylsilane*,

$CH_3Si(OCN)_3$ methyltriisocyanatosilane,

30   [* These generate acid catalyst upon exposure to water]

and or combinations of any of the above.

In another embodiment of the invention, the composition includes a polymer
synthesized from compounds denoted by Formula I by way of hydrolysis and
5   condensation reactions, wherein the number average molecular weight ranges
from about 150 to about 300,000 amu, or more typically from about 150 to
about 10,000 amu.

In a further embodiment of the invention, silicon-containing prepolymers
10   useful according to the invention include organosilanes, including, for
example, alkoxysilanes according to Formula II:

$$R$$
$$|$$
15                              $$R\text{-Si-}R$$ Formula II
$$|$$
$$R$$
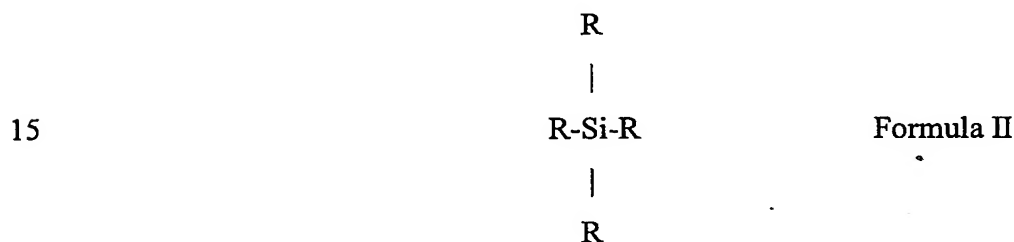
Optionally, Formula II is an alkoxysilane wherein at least 2 of the R groups
20   are independently C_1 to C_4 alkoxy groups, and the balance, if any, are
independently selected from the group consisting of hydrogen, alkyl, phenyl,
halogen, substituted phenyl. For purposes of this invention, the term alkoxy
includes any other organic groups which can be readily cleaved from silicon at
temperatures near room temperature by hydrolysis. R groups can be ethylene
25   glycoxy or propylene glycoxy or the like, but preferably all four R groups are
methoxy, ethoxy, propoxy or butoxy. The most preferred alkoxysilanes
nonexclusively include tetraethoxysilane (TEOS) and tetramethoxysilane.

In a further option, for instance, the prepolymer can also be an
30   alkylalkoxysilane as described by Formula II, but instead, at least 2 of the R

12

groups are independently C_1 to C_4 alkylalkoxy groups wherein the alkyl

moiety is C_1 to C_4 alkyl and the alkoxy moiety ij C_1 to C_6 alkoxy, or ether-

alkoxy groups; and the balance, if any, are independently selected from the

group consisting of hydrogen, alkyl, phenyl, halogen, substituted phenyl. In

5   one preferred embodiment, each R is methoxy, ethoxy or propoxy. In another

preferred embodiment, at least two R groups are alkylalkoxy groups wherein

the alkyl moiety is C_1 to C_4 alkyl and the alkoxy moiety is C_1 to C_6 alkoxy. In

yet another preferred embodiment for a vapor phase precursor, at least two R

groups are ether-alkoxy groups of the formula $(C_1$ to C_6 alkoxy)$_n$ wherein n is

10   2 to 6.

Preferred silicon containing prepolymers include, for example, any or a

combination of alkoxysilanes such as tetraethoxysilane, tetrapropoxysilane,

tetraisopropoxysilane, tetra(methoxyethoxy)silane, ·

15   tetra(methoxyethoxyethoxy)silane which have four groups which may be

hydrolyzed and than condensed to produce silica, alkylalkoxysilanes such as

methyltriethoxysilane silane, arylalkoxysilanes such as phenyltriethoxysilane

and precursors such as triethoxysilane which yield SiH functionality to the

film. Tetrakis(methoxyethoxyethoxy)silane, tetrakis(ethoxyethoxy)silane,

20   tetrakis(butoxyethoxyethoxy)silane, tetrakis(2-ethylthoxy)silane,

tetrakis(methoxyethoxy)silane, and tetrakis(methoxypropoxy)silane are

particularly useful for the invention.

In a still further embodiment of the invention, the alkoxysilane compounds

25   described above may be replaced, in whole or in part, by compounds with

acetoxy and/or halogen-based leaving groups. For example, the prepolymer

may be an acetoxy (CH_3-CO-O-) such as an acetoxysilane compound and/or a

halogenated compound, e.g., a halogenated silane compound and/or

combinations thereof. For the halogenated prepolymers the halogen is, e.g.,

30   Cl, Br, I and in certain aspects, will optionally include F. Preferred acetoxy-

derived prepolymers include, e.g., tetraacetoxysilane, methyltriacetoxysilane and/or combinations thereof.

5   In one particular embodiment of the invention, the silicon containing prepolymer includes a monomer or polymer precursor, for example, acetoxysilane, an ethoxysilane, methoxysilane and/or combinations thereof. In a more particular embodiment of the invention, the silicon containing prepolymer includes a tetraacetoxysilane, a C_1 to about C_6 alkyl or aryl-triacetoxysilane and combinations thereof. In particular, as exemplified

10   below, the triacetoxysilane is a methyltriacetoxysilane.

The silicon containing prepolymer is preferably present in the overall composition in an amount of from about 10 weight percent to about 80 weight percent, preferably present in the overall composition in an amount of from

15   about 20 weight percent to about 60 weight percent.

The composition preferably contains a catalyst. For non-microelectronic applications, the onium or nucleophile catalyst may contain metal ions. Examples include sodium hydroxide, sodium sulfate, potassium hydroxide,

20   lithium hydroxide, and zirconium containing catalysts. For microelectronic applications, preferably, the composition preferably contains a metal-ion-free catalyst which may be, for example, an onium compound or a nucleophile. The catalyst may be, for example an ammonium compound, an amine, a phosphonium compound or a phosphine compound. Non-exclusive examples

25   of such include tetraorganoammonium compounds and tetraorganophosphonium compounds including tetramethylammonium acetate, tetramethylammonium hydroxide, tetrabutylammonium acetate, triphenylamine, trioctylamine, tridodecylamine, triethanolamine, tetramethylphosphonium acetate, tetramethylphosphonium hydroxide,

30   triphenylphosphine, trimethylphosphine, trioctylphosphine, and combinations

thereof. The composition may comprise a non-metallic, nucleophilic additive which accelerates the crosslinking of the composition. These include dimethyl sulfone, dimethyl formamide, hexamethylphosphorous triamide (HMPT), amines and combinations thereof. The catalyst is preferably present in the

5   overall composition in an amount of from about 1 ppm by weight to about 1000 ppm, preferably present in the overall composition in an amount of from about 6 ppm to about 200 ppm.

The composition then contains at least one porogen. A porogen may be a

10   compound or oligomer or polymer and is selected so that, when it is removed, e.g., by the application of heat, a silica dielectric film is produced that has a nanometer scale porous structure. The scale of the pores produced by porogen removal is proportional to the effective steric diameters of the selected porogen component. The need for any particular pore size range (i.e., diameter) is

15   defined by the scale of the semiconductor device in which the film is employed. Furthermore, the porogen should not be so small as to result in the collapse of the produced pores, e.g., by capillary action within such a small diameter structure, resulting in the formation of a non-porous (dense) film. Further still, there should be minimal variation in diameters of all pores in the pore

20   population of a given film. It is preferred that the porogen is a compound that has a substantially homogeneous molecular weight and molecular dimension, and not a statistical distribution or range of molecular weights,and/or molecular dimensions, in a given sample. The avoidance of any significant variance in the molecular weight distribution allows for a substantially

25   uniform distribution of pore diameters in the film of the inventive processes. If the produced film has a wide distribution of pore sizes, the likelihood is increased of forming one or more large pores, i.e., bubbles, that could interfere with the production of reliable semiconductor devices.

Furthermore, the porogen should have a molecular weight and structure such
that it is readily and selectively removed from the film without interfering with
film formation. This is based on the nature of semiconductor devices, which
typically have an upper limit to processing temperatures. Broadly, a porogen

5   should be removable from the newly formed film at temperatures below, e.g.,
about 450°C. In particular embodiments, depending on the desired post film
formation fabrication process and materials, the porogen is selected to be
readily removed at temperatures ranging from about 150 °C to about 450°C
during a time period ranging, e.g., from about 30 seconds to about 60 minutes.

10   The removal of the porogen may be induced by heating the film at or above
atmospheric pressure or under a vacuum, or by exposing the film to radiation,
or both.

Porogens which meet the above characteristics include those compounds and

15   polymers which have a boiling point, sublimation temperature, and/or
decomposition temperature (at atmospheric pressure) range, for example, from
about 150°C to about 450°C. In addition, porogens suitable for use according
to the invention include those having a molecular weight ranging, for example,
from about 100 to about 50,000 amu, and more preferably in the range of

20   from about 100 to about 3,000 amu.

Porogens suitable for use in the processes and compositions of the invention
include polymers, preferably those which contain one or more reactive groups,
such as hydroxyl or amino. Within these general parameters, a suitable

25   polymer porogen for use in the compositions and methods of the invention is,
e.g., a polyalkylene oxide, a monoether of a polyalkylene oxide, a diether of a
polyalkylene oxide, bisether of a polyalkylene oxide, an aliphatic polyester, an
acrylic polymer, an acetal polymer, a poly(caprolactone), a poly(valeractone),
a poly(methyl methacrylate), a poly (vinylbutyral) and/or combinations

30   thereof. When the porogen is a polyalkylene oxide monoether, one particular

embodiment is a C_1 to about C_6 alkyl chain between oxygen atoms and a C_1 to about C_6 alkyl ether moiety, and wherein the alkyl chain is substituted or unsubstituted, e.g., polyethylene glycol monomethyl ether, polyethylene glycol dimethyl ether, or polypropylene glycol monomethyl ether.

5

Other useful porogens are porogens that do not bond to the silicon containing pre-polymer, and include a poly(alkylene) diether, a poly(arylene) diether, poly(cyclic glycol) diether, Crown ethers, polycaprolactone, fully end-capped polyalkylene oxides, fully end-capped polyarylene oxides, polynorbene, and

10   combinations thereof. Preferred porogens which do not bond to the silicon containing pre-polymer include poly(ethylene glycol) dimethyl ethers, poly(ethylene glycol) bis(carboxymethyl) ethers, poly(ethylene glycol) dibenzoates, poly(ethylene glycol) diglycidyl ethers, a poly(propylene glycol) dibenzoates, poly(propylene glycol) diglycidyl ethers, poly(propylene glycol)

15   dimethyl ether, 15-Crown 5, 18-Crown-6, dibenzo-18-Crown-6, dicyclohexyl-18-Crown-6, dibenzo-15-Crown-5 and combinations thereof.

Without meaning to be bound by any theory or hypothesis, it is believed that porogens that are "readily removed from the film" undergo one or a

20   combination of the following events: (1) physical evaporation of the porogen during the heating step , (2) degradation of the porogen into more volatile molecular fragments, (3) breaking of the bond(s) between the porogen and the Si containing component, and subsequent evaporation of the porogen from the film, or any combination of the preceding modes (1)-(3). The porogen is

25   heated until a substantial proportion of the porogen is removed, e.g., at least about 50% by weight, or more, of the porogen is removed. More particularly, in certain embodiments, depending upon the selected porogen and film materials, at least about 75% by weight, or more, of the porogen is removed. Thus, by "substantially" is meant, simply by way of example, removing from

30   about 50% to about 75%, or more, of the original porogen from the applied

17

film. A porogen is preferably present in the overall composition, in an amount
ranging from about 1 to about 50 weight percent, or more. More preferably the
porogen is present in the composition, in an amount ranging from about 2 to
about 20 weight percent. The greater the percentage of porogen employed, the
5   greater is the resulting porosity.

The overall composition then optionally includes a solvent composition.
Reference herein to a "solvent" should be understood to encompass a single
solvent, polar or nonpolar and/or a combination of compatible solvents
10   forming a solvent system selected to solubilize the overall composition
components. A solvent is optionally included in the composition to lower its
viscosity and promote uniform coating onto a substrate by art-standard
methods. Suitable solvents for use in such solutions of the present
compositions include any suitable pure or mixture of organic, organometallic,
15   or inorganic molecules that are volatized at a desired temperature. In order to
facilitate solvent removal, the solvent is one which has a relatively low boiling
point relative to the boiling point of any selected porogen and the other
precursor components. For example, solvents that are useful for the processes
of the invention have a boiling point ranging from about 50 °C to about 250 °C
20   to allow the solvent to evaporate from the applied film and leave the active
portion of the precursor composition in place. In order to meet various safety
and environmental requirements, the solvent preferably has a high flash point
(generally greater than 40 °C) and relatively low levels of toxicity. A suitable
solvent includes, for example, hydrocarbons, as well as solvents having the
25   functional groups C-O-C (ethers), -CO-O (esters), -CO- (ketones), -OH
(alcohols), and –CO-N-(amides), and solvents which contain a plurality of
these functional groups, and combinations thereof. ·

Without limitation, suitable solvents include aprotic solvents, for example,
30   cyclic ketones such as cyclopentanone, cyclohexanone, cycloheptanone, and

cyclooctanone; cyclic amides such as N-alkylpyrrolidinone wherein the alkyl has from about 1 to 4 carbon atoms; and N-cyclohexylpyrrolidinone and mixtures thereof. A wide variety of other organic solvents may be used herein insofar as they are able to effectively control the viscosity of the resulting

5   solution as a coating solution. Other suitable solvents include methyethylketone, methylisobutylketone, dibutyl ether, cyclic dimethylpolysiloxanes, butyrolactone, γ-butyrolactone, 2-heptanone, ethyl 3-ethoxypropionate, 1-methyl-2-pyrrolidinone, and propylene glycol methyl ether acetate (PGMEA), and hydrocarbon solvents such as mesitylene,

10   xylenes, benzene, and toluene. Other suitable solvents include di-n-butyl ether, anisole, acetone, 3-pentanone, 2-heptanone, ethyl acetate, n-propyl acetate, n-butyl acetate, ethyl lactate, ethanol, 2-propanol, dimethyl acetamide, propylene glycol methyl ether acetate, and/or combinations thereof. It is preferred that the solvent does not react with the silicon containing prepolymer

15   component. The solvent component is preferably present in an amount of from about 10 % to about 95 % by weight of the overall composition. A more preferred range is from about 20 % to about 75 % and most preferably from about 20 % to about 60 %. The greater the percentage of solvent employed, the thinner is the resulting film.

20

In another embodiment the composition may comprises water, either as liquid or water vapor. For example, the overall composition may be applied to a substrate and then exposed to an ambient atmosphere that includes water vapor at standard temperatures and standard atmospheric pressure.

25   Optionally, the composition is prepared prior to application to a substrate to include water in a proportion suitable for initiating aging of the precursor composition, without being present in a proportion that results in the precursor composition aging or gelling before it can be applied to a desired substrate. By way of example, when water is mixed into the precursor composition it is

30   present in a proportion wherein the composition comprises water in a molar

ratio of water to Si atoms in the silicon containing prepolymer ranging from about 0.1:1 to about 50:1. A more preferred range is from about 0.1:1 to about 10:1 and most preferably from about 0.5:1 to about 1.5:1.

5   Those skilled in the art will appreciate that specific temperature ranges for crosslinking and porogen removal from the nanoporous dielectric films will depend on the selected materials, substrate and desired nanoscale pore structure, as is readily determined by routine manipulation of these parameters. Generally, the coated substrate is subjected to a treatment such as heating to effect

10   crosslinking of the composition on the substrate to produce a gelled film.

Crosslinking may be done by heating the film at a temperature ranging from about 100 °C to about 250 °C, for a time period ranging from about 30 seconds to about 10 minutes to gel the film. The artisan will also appreciate that any

15   number of additional art-known curing methods are optionally employed, including the application of sufficient energy to cure the film by exposure of the film to electron beam energy, ultraviolet energy, microwave energy, and the like, according to art-known methods.

20   Once the film has aged, i.e., once it is is sufficiently condensed to be solid or substantially solid, the porogen can be removed. The latter should be sufficiently non-volatile so that it does not evaporate from the film before the film solidifies. The porogen is removed by heating the gelled film at a temperature ranging from about 150 °C to about 450 °C, preferably from about

25   150 °C to about 350 °C for a time period ranging from about 30 seconds to about 1 hour. Preferably the crosslinking is conducted at a temperature which is less than the porogen removal temperature.

The present layers may also comprise additional components such as antifoam agents, detergents, flame retardants, pigments, plasticizers, stabilizers, and

surfactants. The composition is particularly useful in microelectronic applications as a dielectric substrate material in microchips, multichip modules, laminated circuit boards, or printed wiring boards.

5   The films may be formed on the substrate by solution techniques such as spraying, rolling, dipping, spin coating, flow coating, or casting, or chemical vapor deposition, with spin coating being preferred for microelectronics. For chemical vapor deposition (CVD), the composition is placed into an CVD apparatus, vaporized, and introduced into a deposition chamber containing the

10   substrate to be coated. Vaporization may be accomplished by heating the composition above its vaporization point, by the use of vacuum, or by a combination of the above. Generally, vaporization is accomplished at temperatures in the range of 50°C-300°C under atmospheric pressure or at lower temperature (near room temperature) under vacuum.

15

Three types of CVD processes exist: atmospheric pressure CVD (APCVD), low pressure CVD (LPCVD), and plasma enhanced CVD (PECVD). Each of these approaches had advantages and disadvantages. APCVD devices operate in a mass transport limited reaction mode at temperatures of approximately

20   400°C. In mass-transport limited deposition, temperature control of the deposition chamber is less critical than in other methods because mass transport processes are only weakly dependent on temperature. As the arrival rate of the reactants is directly proportional to their concentration in the bulk gas, maintaining a homogeneous concentration of reactants in the bulk gas

25   adjacent to the wafers is critical. Thus, to insure films of uniform thickness across a wafer, reactors that are operated in the mass transport limited regime must be designed so that all wafer surfaces are supplied with an equal flux of reactant. The most widely used APCVD reactor designs provide a uniform supply of reactants by horizontally positioning the wafers and moving them

30   under a gas stream.

21

In contrast to APCVD reactors, LPCVD reactors operate in a reaction rate-limited mode. In processes that are run under reaction rate-limited conditions, the temperature of the process is an important parameter. To maintain a

5   uniform deposition rate throughout a reactor, the reactor temperature must be homogeneous throughout the reactor and at all wafer surfaces. Under reaction rate-limited conditions, the rate at which the deposited species arrive at the surface is not as critical as constant temperature. Thus, LPCVD reactors do not have to be designed to supply an invariant flux of reactants to all locations

10   of a wafer surface.

Under the low pressure of an LPCVD reactor, for example, operating at medium vacuum (30-250 Pa or 0.25-2.0 torr) and higher temperature (550-600°C), the diffusivity of the deposited species is increased by a factor of

15   approximately 1000 over the diffusivity at atmospheric pressure. The increased diffusivity is partially offset by the fact that the distance across which the reactants must diffusive increases by less than the square root of the pressure. The net effect is that there is more than an order of magnitude increase in the transport of reactants to the substrate surface and by-products

20   away from the substrate surface.

LPCVD reactors are designed in two primary configurations: (a) horizontal tube reactors; and (b) vertical flow isothermal reactors. Horizontal tube, hot wall reactors are the most widely used LPCVD reactors in VLSI processing.

25   They are employed for depositing poly-Si, silicon nitride, and undoped and doped SiO_2 films. They find such broad applicability primarily because of their superior economy, throughput, uniformity, and ability to accommodate large diameter, e.g., 150 mm, wafers.

The vertical flow isothermal LPCVD reactor further extends the distributed gas feed technique so that each wafer receives an identical supply of fresh reactants. Wafers are again stacked side by side, but are placed in perforated-quartz cages. The cages are positioned beneath long, perforated, quartz

5   reaction-gas injector tubes, one tube for each reactant gas. Gas flows vertically from the injector tubes, through the cage perforations, past the wafers, parallel to the wafer surface and into exhaust slots below the cage. The size, number, and location of cage perforations are used to control the flow of reactant gases to the wafer surfaces. By properly optimizing cage

10 perforation design, each wafer may be supplied with identical quantities of fresh reactants from the vertically adjacent injector tubes. Thus, this design may avoid the wafer-to-wafer reactant depletion effects of the end-feed tube reactors, requires no temperature ramping, produces highly uniform depositions, and reportedly achieves low particulate contamination.

15

The third major CVD deposition method is PECVD. This method is categorized not only by pressure regime, but also by its method of energy input. Rather than relying solely on thermal energy to initiate and sustain chemical reactions, PECVD uses an rf-induced glow discharge to transfer

20 energy into the reactant gases, allowing the substrate to remain at a lower temperature than in APCVD or LPCVD processes. Lower substrate temperature is the major advantages of PECVD, providing film deposition on substrates not having sufficient thermal stability to accept coating by other methods. PECVD may also enhance deposition rates over those achieved

25 using thermal reactions. Moreover, PECVD may produce films having unique compositions and properties. Desirable properties such as good adhesion, low pinpole density, good step coverage, adequate electrical properties, and compatibility with fine-line pattern transfer processes, have led to application of these films in VLSI.

30

PECVD requires control and optimization of several deposition parameters, including rf power density, frequency, and duty cycle. The deposition process is dependent in a complex and interdependent way on these parameters, as well as on the usual parameters of gas composition, flow rates, temperature,

5   and pressure. Furthermore, as with LPCVD, the PECVD method is surface reaction limited, and adequate substrate temperature control is thus necessary to ensure uniform film thickness.

CVD systems usually contain the following components: gas sources, gas

10   feed lines, mass-flow controllers for metering the gases into the system, a reaction chamber or reactor, a method for heating the wafers onto which the film is to be deposited, and in some types of systems, for adding additional energy by other means, and temperature sensors. LPCVD and PECVD systems also contain pumps for establishing the reduced pressure and

15   exhausting the gases from the chamber.

The thickness of the porous dielectric layer may range from about 500 Å to about 20,000 Å, preferably from about 1000 Å to about 14,000 Å and more preferably from about 1500 Å to about 10,000 Å.

20

Applied onto the porous dielectric layer is an adhesion promoting dielectric layer, which may also act as a stress buffer, which has a porosity of about 10% or less. The materials of method of forming the an adhesion promoting dielectric layer may be the same as that for the porous dielectric layer except

25   the amounts of porogen and solvent are chosen such that a dielectric layer is produced which has a porosity of about 10% or less, preferably less than 10% and more preferably from about 0.1% to about 10%.

Preferably, the adhesion promoting dielectric layer may be formed by

30   preparing a composition containing the same ingredients as the porous

24

dielectric layer except the porogen is much reduced or preferably omitted completely. The adhesion promoting dielectric layer has a dielectric constant of about 2.8 or more. Preferably the adhesion promoting dielectric layer has a dielectric constant of from about 2.8 to about 4.0, more preferably from about

5   2.9 to about 3.3 and most preferably from about 3.0 to about 3.2. Preferably the combination of the porous dielectric layer and the adhesion promoting dielectric layer has an effective dielectric constant of from about 1.4 to about 3.0, more preferably from about 1.7 to about 2.8. The phrase "effective dielectric constant" as used here means _dielectric constant of film stack of the

10   porous dielectric layer and the adhesion promoting dielectric layer. The thickness of the adhesion promoting dielectric layer may range from about 1 Å to about 3000 Å, preferably from about 5 Å to about 2000 Å and more preferably from about 10 Å to about 800 Å. Preferably the ratio of the thickness of the adhesion promoting layer to the sum of the adhesion

15   promoting layer and the porous dielectric layer ranges from about 0.02 to about 0.30, more preferably from about 0.02 to about 0.25 and most preferably from about 0.03 to about 0.15. Preferably the coating of the adhesion promoting dielectric layer onto the porous dielectric layer results in an infiltration of the adhesion promoting dielectric layer into the porous

20   dielectric layer of about 300 angstroms or less.

On the adhesion promoting dielectric layer, is a substantially nonporous capping layer. Suitable capping layers include silicon carbide, silicon oxide, silicon nitride, silicon oxynitride, tungsten, tungsten nitride, tantalum,

25   tantalum nitride, titanium, titanium nitride, titanium zirconium nitride, and combinations thereof. The capping layer may be applied to the adhesion promoting layer by any known technique such as spin coat or CVD processes. Preferably the capping layer has a dielectric constant of from about 2.8 to about 7.0, more preferably from about 4.0 to about 7.0. The thickness of the

30   capping layer may range from about 200 Å to about 3000 Å, preferably from

about 300 Å to about 2500 Å and more preferably from about 500 Å to about 2000 Å. The adhesion promoting dielectric layer, the porous dielectric layer, and the capping layer are adhered to one another to a degree sufficient to pass the ASTM D 3359-97 test.

5

The multilayered structure may be used in electrical devices and more specifically, as an interlayer dielectric in an interconnect associated with a single integrated circuit chip. An integrated circuit chip typically has on its surface a plurality of layers of the present multilayered structure and multiple

10 layers of metal conductors. It may also include regions of the present multilayered structure between discrete metal conductors or regions of conductor in the same layer or level of an integrated circuit.

The present multilayered structures may be used in dual damascene (such as copper) processing and subtractive metal (such as aluminum or

15 aluminum/tungsten) processing for integrated circuit manufacturing. The present multilayered structures may be used in a desirable all spin-on stacked film having additional dielectrics such as taught by commonly assigned U.S. patents 6,248,457B1; 5,986,045; 6,124,411; and 6,303,733.

20   Analytical Test Methods:

Dielectric Constant: The dielectric constant was determined by coating a thin film of aluminum on the cured layer and then doing a capacitance-voltage measurement at 1MHz and calculating the k value based on the layer

25   thickness.

Average Pore Size Diameter: The N_2 isotherms of porous samples was measured on a Micromeretics ASAP 2000 automatic isothermal N_2 sorption

26

instrument using UHP (ultra high purity industrial gas) N_2, with the sample immersed in a sample tube in a liquid N_2 bath at 77°K.

For sample preparation, the material was first deposited on silicon wafers
5   using standard processing conditions. For each sample, three wafers were prepared with a film thickness of approximately 6000 Angstroms. The films were then removed from the wafers by scraping with a razor blade to generate powder samples. These powder samples were pre-dried at 180°C in an oven before weighing them, carefully pouring the powder into a 10 mm inner
10   diameter sample tube, then degassing at 180 °C at 0.01 Torr for > 3 hours.

The adsorption and desorption N_2 sorption was then measured automatically using a 5 second equilibration interval, unless analysis showed that a longer time was required. The time required to measure the isotherm was
15   proportional to the mass of the sample, the pore volume of the sample, the number of data points measured, the equilibration interval, and the P/Po tolerance . (P is the actual pressure of the sample in the sample tube. Po is the ambient pressure outside the instrument.) The instrument measures the N_2 isotherm and plots N_2 versus P/Po.
20

The apparent BET (Brunauer, Emmett, Teller method for multi-layer gas absorption on a solid surface disclosed in S. Brunauer, P. H. Emmett, E. Teller; *J. Am. Chem. Soc.* 60, 309-319 (1938)) surface area was calculated from the lower P/Po region of the N2 adsorption isotherm using the BET
25   theory, using the linear section of the BET equation that gives an R^2 fit > 0.9999.

The pore volume was calculated from the volume of N_2 adsorbed at the relative pressure P/Po value, usually P/Po ~ 0.95, which is in the flat region of
30   the isotherm where condensation is complete, assuming that the density of the

27

adsorbed N_2 is the same as liquid N_2 and that all the pores are filled with condensed N_2 at this P/Po.

The pore size distribution was calculated from the adsorption arm of the N_2

5   isotherm using the BJH (E. P. Barret, L. G. Joyner, P. P. Halenda; *J. Am. Chem. Soc.*, 73, 373-380 (1951)) theory. This uses the Kelvin equation, which relates curvature to suppression of vapor pressure, and the Halsey equation, which describes the thickness of the adsorbed N_2 monolayer versus P/Po, to convert the volume of condensed N_2 versus P/Po to the pore volume in a

10 particular range of pore sizes.

The average cylindrical pore diameter D was the diameter of a cylinder that has the same apparent BET surface area Sa (m^2/g) and pore volume Vp (cc/g) as the sample, so D (nm) = 4000Vp/Sa.

15

Refractive Index: The refractive index measurements were performed together with the thickness measurements using a J.A. Woollam M-88 spectroscopic ellipsometer. A Cauchy model was used to calculate the best fit for Psi and Delta. Unless noted otherwise, the refractive index was reported at a wavelenth of 633nm (details on

20 Ellipsometry can be found in e.g. "Spectroscopic Ellipsometry and Reflectometry" by H.G. Thompkins and William A. McGahan, John Wiley and Sons, Inc., 1999).

Adhesion: The sample was prepared and tested according to ASTM D3359-97.

25

Chemical Mechanical Polishing (CMP) was conducted under the following condition. The polisher is IPEC 472. The slurry being used was EKC Cu Phase II, silica-based slurry for barrier Ta/TaN removal, and the slurry flow rate was 200 cc/min. The primary pad was the Rodel IC1400/SubaIV, K-

30 groove, where as the secondary pad was the Polytex. The conditioning disk

was the Marshal whirlpool 4" diamond disk, and the post CMP) cleaning was conducted with the OnTrak Synergy using DI water as the solvent.

The following non-limiting examples serve to illustrate the invention.

5

EXAMPLES

A porous dielectric layer which has a porosity of about 10% or more was produced as follows. This porous dielectric layer is employed in the following
10   examples.

Crude PEO (polyethylene glycol monomethyl ether MW=550) with high concentration of sodium was purified by mixing the crude PEO with water in a 50:50 weight ratio. This mixture was passed through an ion exchange resin to
15   remove metals. The filtrate was collected and subjected to vacuum distillation to remove water to produce neat, low metal PEO (with <100 ppb Na). A precursor was prepared by combining, in a 100 ml round bottom flask (containing a magnetic stirring bar), 10g tetraacetoxysilane, 10g methyltriacetoxysilane, and 17g propylene glycol methyl ethyl acetate
20   (PGMEA). These ingredients were combined within an N_2 -environment (N_2 glove bag). The flask was also connected to an N_2 environment to prevent environmental moisture from entering the solution (standard temperature and pressure).

25   The reaction mixture was heated to 80 °C before 1.5 g of water was added to the flask. After the water addition is complete, the reaction mixture was allowed to cool to ambient before 4.26 g of low metal polyethylene glycol monomethylether ("PEO"; MW550 amu) (with >300 ppb Na) was added as a porogen and tetraorganoammonium acetate (TMAA, 19×10^{-8} mole/gm of
30   solution, which corresponds to approximately 10 ppm of TMAA by weight)

was added as a catalyst, and stirring continued for another 2 hrs. Thereafter, the resulting solution was filtered through a 0.2 micron filter to provide the precursor solution masterbatch for the next step.

5   The solution was then deposited onto a series of 8-inch silicon wafers, each on a spin chuck and spun at 2500 rpm for 30 seconds. The presence of water in the precursor resulted in the film coating being substantially condensed by the time that the wafer was inserted into the first oven. Insertion into the first oven, as discussed below, takes place within the 10 seconds of the completion

10   of spinning. Each coated wafer was then transferred into a sequential series of ovens preset at specific temperatures, for one minute each. In this example, there are three ovens, and the preset oven temperatures were 125°C, 200°C, and 350°C, respectively. The PEO was driven off by these sequential heating steps as each wafer was moved through each of the three respective ovens.

15   Each wafer was cooled after receiving the three-oven stepped heat treatment, and the produced dielectric film was measured using ellipsometry to determine its thickness and refractive index. Each film-coated wafer was then further cured at 425°C for one hour under flowing nitrogen. A non-porous film made from the liquid precursor of this invention will have a refractive index of 1.41

20   and a $k_{de\text{-}gas}$ of 3.2. In comparison, air has a refractive index of 1.0. The porosity of a nanoporous film of the invention, is therefore proportional to the percentage of its volume that is air. The film has a bake thickness of 5920 Å, a bake refractive index of 1.234, a cure thickness of 5619 Å and a cure refractive index of 1.231. The cured film produced has a porosity of about

25   43%. The capacitance of the film was measured after heating the wafer in a hot plate at 200C for 2 minutes in order to drive off adsorbed moisture. Dielectric constant based on the de-moisture capacitance is called k de-gas.

EXAMPLE 1 (COMPARATIVE)

A series of 8-inch silicon wafers was deposited with a layer of cured film of the above porous dielectric layer (300 or 600 nm). A CVD capping layer (200 nm of SiC or SiO_2) was deposited onto the porous dielectric film layer in the

5 absence of an adhesion promoting dielectric layer. Entries 1, 4 and 9 illustrate poor adhesion of the porous dielectric layer to either a SiC or SiO_2 capping layer in the absence of an adhesion promoting dielectric layer. A tape test was performed according to the standard test method (ASTM D 3359-97). It was observed that the adhesion of the porous dielectric layer to the capping layer is

10 inferior and the CVD capping layer was easily removed.

EXAMPLE 2 (COMPARATIVE)

A PGMEA solution of hydridopolycarbosilanes was deposited onto a series of

15 8-inch silicon wafers (pre-coated with the porous dielectric layer produced above, 300 nm), each on a spin chuck and spun at 2400 rpm for 30 seconds. The wafer was then inserted into the first oven. Insertion into the first oven, as discussed below, took place within the 10 seconds of the completion of spinning. Each coated wafer was then transferred into a sequential series of

20 ovens preset at specific temperatures, for one minute each. In this example, there are three ovens, and the preset oven temperatures were 125°C, 200°C, and 350°C, respectively. Each wafer was cooled after receiving the three-oven stepped heat treatment, and the produced stacked dielectric film was measured using ellipsometry to determine its thickness and refractive index.

25 Each stack film-coated wafer was then further cured at 425°C for one hour under flowing nitrogen. The film thickness could not be measured due to extremely poor quality. A CVD capping layer (200 nm of SiO_2 for entry 14) was then deposited onto the film stack of adhesion promoter and the porous dielectric layer. A tape test was performed according to the standard test

30 method (ASTM D 3359-97). It was observed that the adhesion of the porous

dielectric layer to the capping layer is inferior and the CVD capping layer was easily removed. The resulting film showed very poor adhesions (< 10% pass).

<u>EXAMPLE 3</u>

5

This example shows the production of an adhesion promoter.

An adhesion promoter precursor was prepared by combining, in a reaction flask, a matrix formed by first mixing 233 g of tetraacetoxysilane and 233 g of

10   methyltriacetoxysilane followed by heating at 80 °C and then adding 35 g of water and cooling the reaction mixture to room temperature. Then 2794 g of propylene glycol methyl ethyl acetate (PGMEA), and 2.5 g of 1% solution of tetramethylammonium acetate in acetic acid (TMAA) are added. The solution was stirred for 2 h, and filtered. The solution was then deposited onto a series

15   of 8-inch silicon wafers (pre-coated with the porous dielectric layer produced above, 300 nm), each on a spin chuck and spun at 2000 rpm for 30 seconds. The presence of water in the precursor resulted in the film coating being substantially condensed by the time that the wafer was inserted into the first oven. Insertion into the first oven, as discussed below, took place within the

20   10 seconds of the completion of spinning. Each coated wafer was then transferred into a sequential series of ovens preset at specific temperatures, for one minute each. In this example, there are three ovens, and the preset oven temperatures were 125°C, 200°C, and 350°C, respectively. Each wafer was cooled after receiving the three-oven stepped heat treatment, and the produced

25   stacked dielectric film was measured using ellipsometry to determine its thickness and refractive index. Each stack film-coated wafer was then further cured at 425°C for one hour under flowing nitrogen. The film has a cure thickness of 40 and 290 nm for the adhesion promoter layer and the porous dielectric layer, respectively. A CVD capping layer (200 nm of SiC for entry

3 or 200 nm of SiO$_2$ for entry 11) was then deposited onto the film stack of adhesion promoter and the porous dielectric layer.

5   The tape test was performed according to the standard method, and it revealed that the adhesion of the resulting film stack is excellent showing no signs of delaminations. An additional CMP ("Chemical Mechanical Polishing") process also indicates that the stack film can survive conditions such as a 5 psi down force for 120 s.

10   EXAMPLE 4

Example 2 is repeated except this example (see entries 2, 7 and 8) has a 23 nm layer (ca. 7%) of adhesion promoter coated on the porous dielectric layer (300 nm). Various thicknesses of silicon carbide were also deposited (100 (entry

15   7), 200 (entry 2) and 300 nm (entry 8)). The tape test results revealed that the adhesion strength depends on the SiC cap thickness. Entry 7 indicates that the adhesion is excellent when there is only a 100 nm of SiC cap. An increase in SiC cap thickness to 200 nm results in a reduced tape test yield of 70%. An even higher SiC cap thickness (300 nm) leads to a much worse tape test yield

20   (20%).(see Figure 1)

                                       EXAMPLE 5

Example 2 is repeated except the porous dielectric layer has a thickness of 600

25   nm, and the SiC cap thickness is fixed at 200 nm. Two different thickness of adhesion promoter are coated onto the porous dielectric layer. Entry 5 shows that adhesion is poor, showing 80% of delaminations when the adhesion promoter layer is only 4% (or 25 nm). However, after the adhesion promoter layer thickness is increased to 10% (or 60 nm), the resulting film stack

30   exhibits excellent adhesion as shown in entry 6.

EXAMPLE 6

5   Example 2 is repeated except that only 25 nm (or 8%) of the adhesion
     promoter layer was deposited onto the porous dielectric layer (300 nm),
     followed by the CVD deposition of 200 nm of SiO_2.

     Subjecting the resulting film stack (entry 10) to the standard tape test revealed
10   80% delaminations.

EXAMPLE 7

15   This example (entry 13) describes the utilization of a commercially available
     methylsiloxane polymer (Honeywell ACCUGLASS® SPIN-ON GLASS T12B
     material) as an adhesion promoter.

     ACCUGLASS® SPIN-ON GLASS T12B solution was deposited onto a series
20   of 8-inch silicon wafers (pre-coated with the porous dielectric layer, 300 nm),
     each on a spin chuck and spun at 2000 rpm for 30 seconds. The presence of
     water in the precursor resulted in the film coating being substantially
     condensed by the time that the wafer was inserted into the first oven. Insertion
     into the first oven, as discussed below, took place within the 10 seconds of the
25   completion of spinning. Each coated wafer was then transferred into a
     sequential series of ovens preset at specific temperatures, for one minute each.
     In this example, there are three ovens, and the preset oven temperatures were
     125°C, 200°C, and 350°C, respectively. Each wafer was cooled after
     receiving the three-oven stepped heat treatment, and the produced stacked
30   dielectric film was measured using ellipsometry to determine its thickness and

refractive index. Each stack film-coated wafer was then further cured at
425°C for one hour under flowing nitrogen. The film has a cure thickness of
40 and 280 nm for the adhesion promoter layer and the porous dielectric layer,
respectively.

5

A CVD cap (200 nm of SiO_2) was then deposited onto the film stack of
adhesion promoter and the porous dielectric layer. The tape test was
performed according to the standard method, and it revealed that the adhesion
of the resulting film stack is excellent, showing no signs of delaminations.

10   Additional CMP process also indicates that the stack film can survive
conditions such as 5 psi down force for 120 s.

EXAMPLE 8

15

Example 6 is repeated except that only 25 nm of ACCUGLASS® SPIN-ON
GLASS T12B was coated onto the porous dielectric layer (8% or 280 nm,
entry 12). Because of the reduction in adhesion promoter layer thickness, the
resulting film shows a 40% delaminations by the tape test.

20

TABLE

	Thickness (nm)	Adhesion Promoter		CAP Thickness (nm)		Tape Test	CMP[3] Observation
	ILD	Type[1]	Fraction[2]	SiC	SiO$_2$	%Pass	
1	300	None		200		0	FAILED
2	300	A	7 %	200		70	PASS
3	300	A	12 %	200		100	PASS
4	600	None		200		0	FAILED
5	600	A	4%	200		20	PASS
6	600	A	10 %	200		100	PASS
7	300	A	7 %	100		100	PASS
8	300	A	7 %	300		20	PASS
9	300	None			200	0	FAILED
10	300	A	8 %		200	20	PASS
11	300	A	12 %		200	100	PASS
12	300	B	8 %		200	60	PASS
13	300	B	10 %		200	100	PASS
14	300	C	-		200	< 10	FAILED

5   [1] A = the porous dielectric layer;B = ACCUGLASS® SPIN-ON GLASS T12B
and C = Hydridopolycarbosilanes [2] Fraction = ratio of the thickness of the
adhesion promoting dielectric layer to the total thickness of the adhesion
promoting dielectric layer and the porous dielectric layer; [3]
C(hemical)M(echanical)P(olishing) condition is described in detail in the
10   experimental section. PASS = no delaminations. FAILED = delaminations.

While the present invention has been particularly shown and described with
reference to preferred embodiments, it will be readily appreciated by those of
ordinary skill in the art that various changes and modifications may be made
15   without departing from the spirit and scope of the invention. It is intended that
the claims be interpreted to cover the disclosed embodiment, those alternatives
which have been discussed above and all equivalents thereto.